


# How to change sensor substrate

## Remove sensor substrate



1. Remove screw of sensor box with screwdriver.

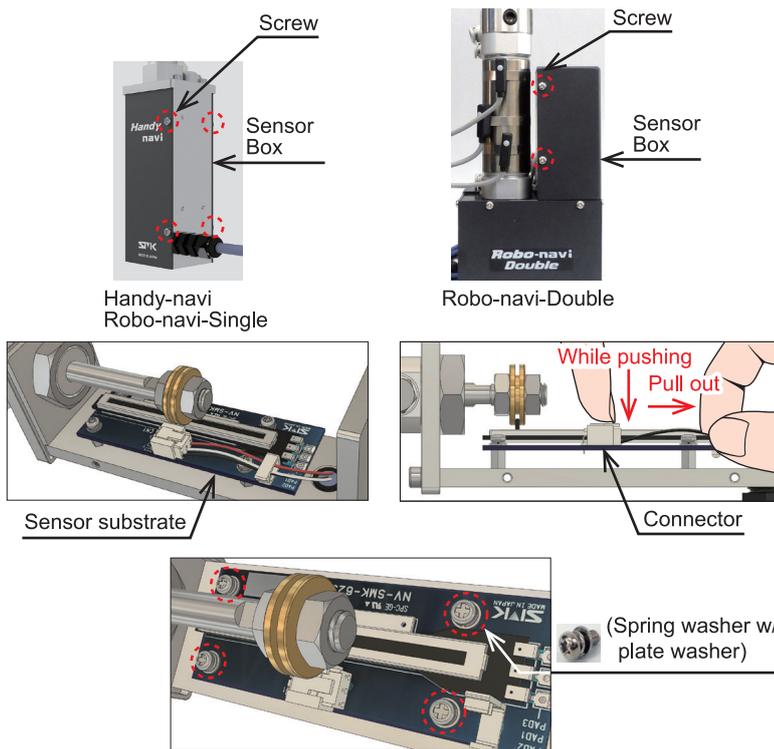


2. Remove connector from sensor substrate. (Pull out while pushing upper part of connector.)



3. Remove screw of sensor substrate.

## Attach sensor substrate

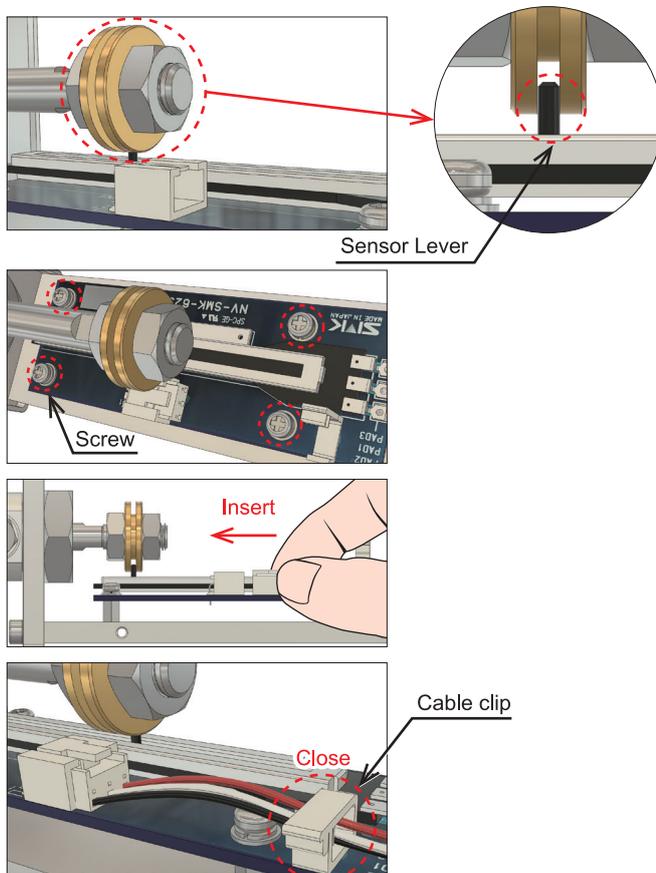

1. Insert sensor lever into groove.



2. Put screw of sensor substrate.



3. Insert connector into sensor substrate.



4. Close cable clip.

## Warranty

Product name	navi Linear Sensor
Warranty period	For 2 years from the date of purchase or 2 million welding points

## SMK Co., Ltd.

2-10-5 Hashimotodai, Midori-ku Sagami-hara  
 Kanagawa 252-0132, Japan  
 TEL: +81-42-703-0016 FAX: +81-42-703-0026  
 E-mail : smk\_overseas@e-smk.co.jp